


# Female Disconnects - Nylon Fully Insulated with Insulation Grip



Product Number <sup>†</sup>	UPC (054007-)	Wire Range (AWG)	Mates with Male Tab Width(W') x Thickness	L	W	D	Barrel Length	Barrel I.D.	Maximum Insulation Diameter	Terminals per:	
										Carton	Case
MNG20-110DFIK*	00996	26-20	0.110-0.125 x 0.020	0.66	0.22	0.15	0.13	0.055	0.093	—	1000
MNG18-187DFIX	11704	22-18	0.187 x 0.020	0.81	0.30	0.23	0.25	0.085	0.145	100	500
MNG18-187DFIK	11816	22-18	0.187 x 0.020	0.81	0.30	0.23	0.25	0.085	0.145	—	1000
MNG18-250DFIX	11705	22-18	0.250 x 0.032	0.87	0.37	0.23	0.25	0.080	0.145	100	500
MNG18-250DFIK	02293	22-18	0.250 x 0.032	0.87	0.37	0.23	0.25	0.080	0.145	—	1000
MNG14-187DFIX	11715	16-14	0.187 x 0.020	0.81	0.30	0.23	0.25	0.085	0.145	100	500
MNG14-187DFIK	15975	16-14	0.187 x 0.020	0.81	0.30	0.23	0.25	0.085	0.145	—	1000
MNG14-250DFIX	11716	16-14	0.250 x 0.032	0.87	0.37	0.23	0.25	0.080	0.145	100	500
MNG14-250DFIK	01841	16-14	0.250 x 0.032	0.87	0.37	0.23	0.25	0.080	0.145	—	1000

\* Not ULListed or CSACertified

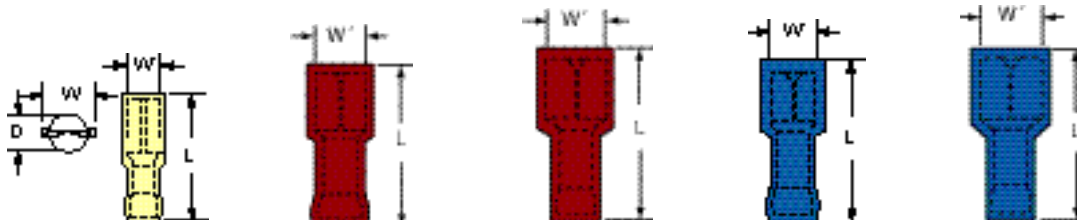

<b>Stud Size</b>	MNG20-110DFI	MNG18-187DFI	MNG18-250DFI	MNG14-187DFI	MNG14-250DFI
<b>Wire Range</b>	26-20	22-18	22-18	16-14	16-14
<b>Suggested Mate</b>	0.110 Male Tab	MNG18-187DMI	MNG18-250DMI	MNG14-187DMI	MNG14-250DMI